

Product Specification

Title	0-10V Dimmable LED Driver
Model	BQ-015ANPC
Specification	Input: 100~265Vac 50/60Hz Output: 36-50V/300mA 24-42/350mA
Power Range	10-15W
Author	R&D
Document NO.	RDPS-2202
Date	2021-01-03
Revision	2.0

1. Product Describes

1.1 This engineering report describes the design for a **0-10V dimmable Constant Current led driver** for LED applications.

1.2 Prototype Photo




1.3 Physical size

L (mm)	W (mm)	H (mm)
100	43	21
±1	±1	±1

1.4 Working principle

BQ-015ANPC 0-10V Dimmable LED Driver is with the CC feature, the working condition is as the picture under.

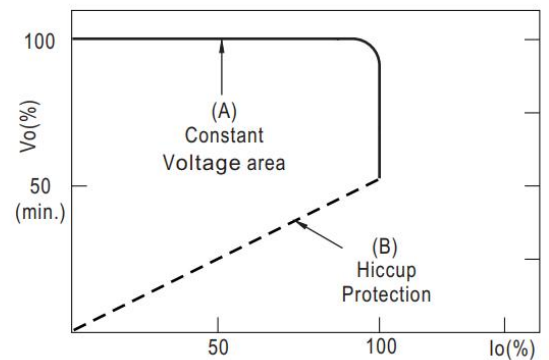

Typical output current normalized by rated current (%)

1.5 Circuit Drawing



2. Electric Idiosyncrasy





2.1 Specs.



Model	BQ-015ANPC		
Output	DC Voltage	36-50V	24-42V
	Output Current	300mA	350mA
	Output Power	10-15W	
	Flicker Index	Modulation depth ≤1% Complies with the flicker-free standard (IEEE Std 1789-2015)	
	Ripple Current	<10%(rated current)	
	Current Tolerance	±5%	±5%
	Temperature Drift	±5%	
	Start-up Time	<1.5S@230Vac	
Input	Input Voltage	100-265VAC	
	Frequency Range	47-63Hz	
	Power Factor(Typ.)@ full load	0.95@115VAC 0.93@230VAC	
	THD(Typ.)@ full load	<20%@230Vac (DC42V full load)	
	Efficiency(Typ.)	85%@ full load	85%@ full load
	AC Current(Max.)	0.2A	
	Inrush Current (Typ.)	≤14A&74uS@230Vac	
	Leakage current	<0.5mA	
Standby Power Consumption	≤0.5W (when 0-10V OFF signal is effective)		
Protection	Short Circuit	Hiccup mode (auto-recovery)	
	Over temperature	100℃±10℃ shut down o/p voltage, automatically recover after cooling.	
Environment	Working TEMP.	-20℃ - +45℃ (see below derating curve)	
	Working Humidity	20~90%RH, non-condensing	
	Storage TEMP.Humidity	-30~+80℃, 10~90%RH	
	Atmospheric Pressure	86kPa~106kPa	
Safety& EMC	Certifications	TUV-CE, CB, SAA, RoHS	
	Safety standards	EN61347	
	Withstand voltage	I/P-O/P: 3.75KVac 5mA 60S	
	Insulation Resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH	
	EMC EMISSION	EN55015; EN61000-3-2; EN61000-3-3;	
	EMC IMMUNITY	EN61547	
Others	Dimming Function	0-10V	
	Dimension	100*43*21 mm (L*W*H)	
	Warranty	5 Years (Tc≤77.5℃)	

2.2 Characteristic Curve


2.2.1 Power Factor Characteristic Curve

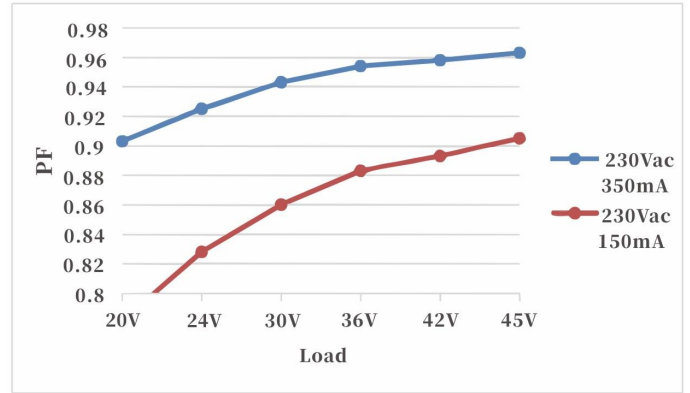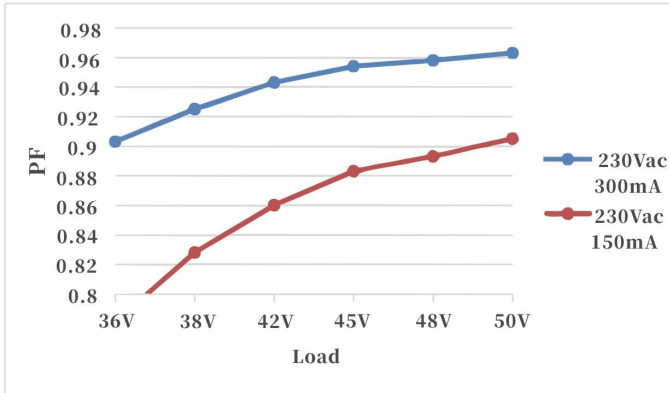


2.2.2 Power Efficiency Characteristic Curve

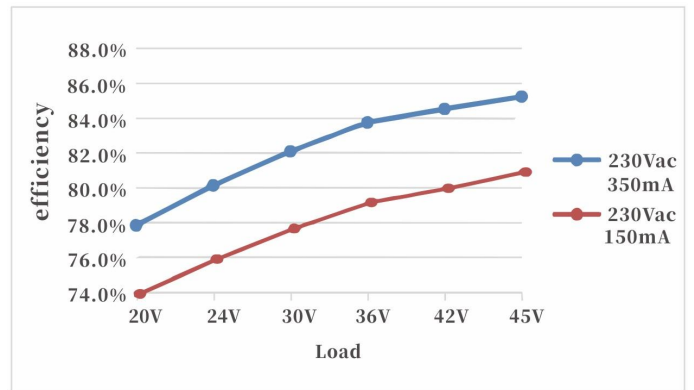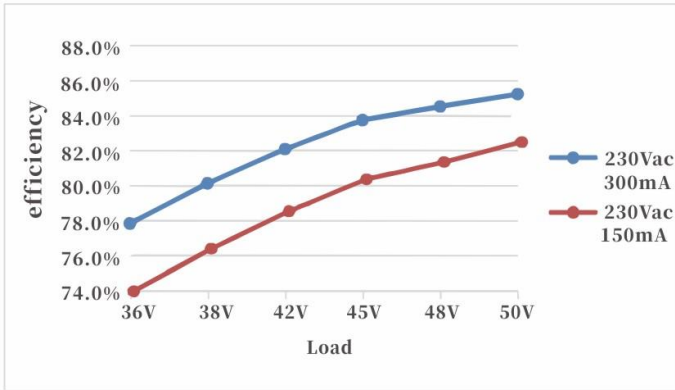

2.2.3 Lifetime Characteristic Curve

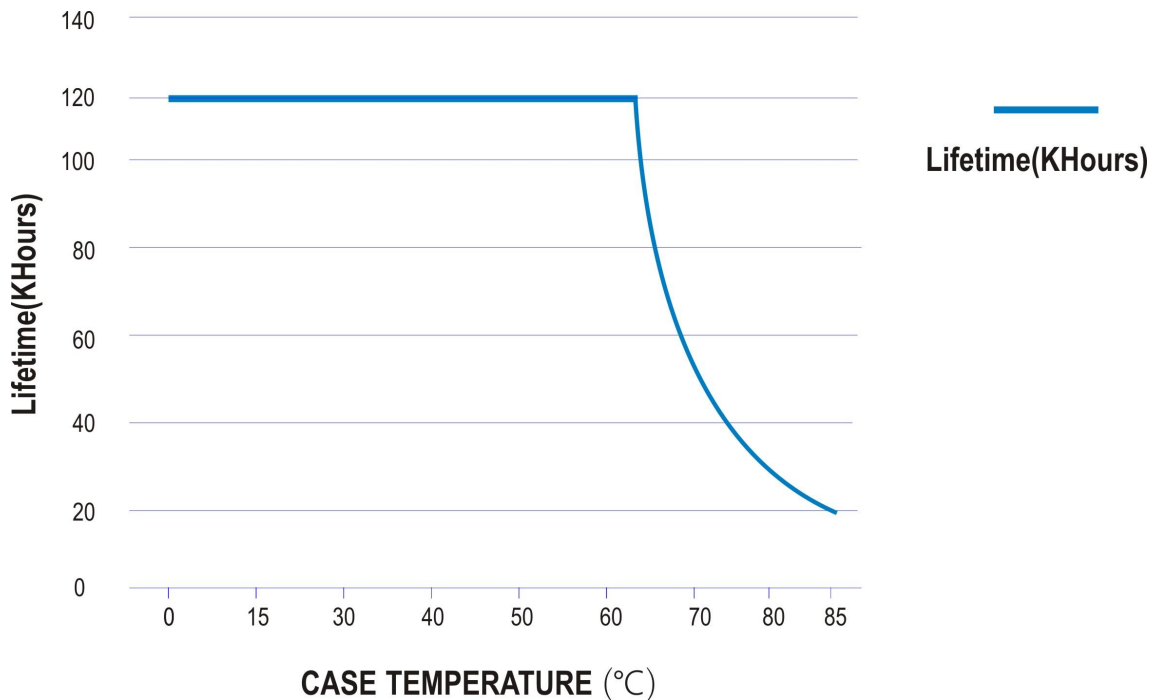

2.2.4 Dimming Curve

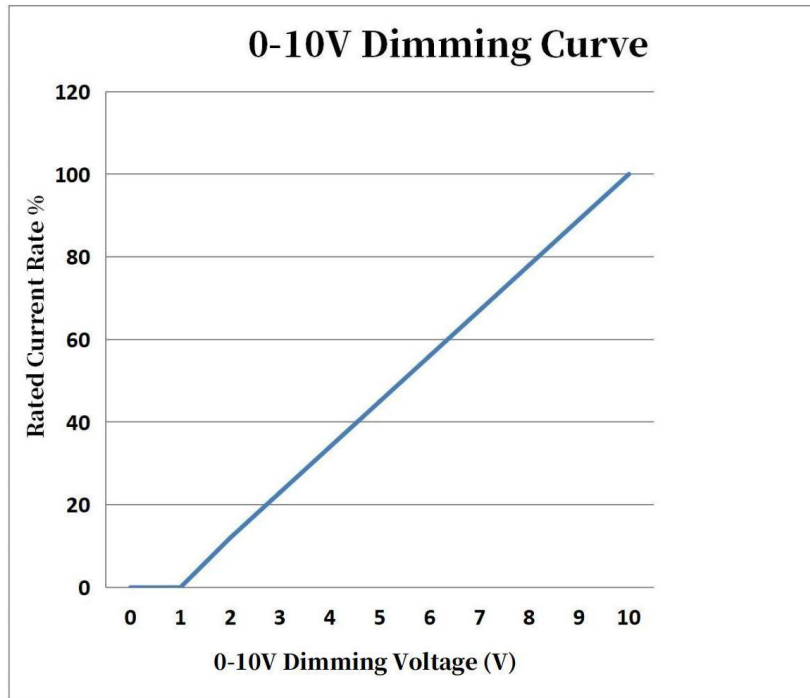

- Connect the 0-10V signals to the DIM terminal and the positive electrode connects to +, and the negative electrode connects to -.

- In 0-10V dimming mode, when the input voltage is less than 0.9V, the light will be turned off. When it's more than 0.9V, the light will be turned on. ($\pm 0.2V$ tolerance is acceptable.)

- The minimum dimming depth of 0-10V dimming is 0.5%.

- The pins of the 0-10V DIM terminal without any signal connected: 100% rated output current

3. Real Photo

