

Product Specification

Title	0-10V Dimmable LED Driver		
Model	BQ-030ANPV (Constant Voltage / Flicker Free)		
Specification	Input: 100~240Vac 50/60Hz Output: 12V/2500mA 24V/1250mA		
Power Range	30W		
Author	R&D		
Document NO.	RDPS-2503		
Date	2021-01-05		
Revision	2.0		



1. Product Description

1.1 This engineering report describes the design for a 0-10V dimmable Constant

Voltage LED Driver for LED applications.

1.2 Prototype Photo

1.3 Physical size

		L	W	Н
	Dimmable 0-10V LED Driver	(mm)	(mm)	(mm)
	MODEL: BQ-030ANYV Input: ACI2V 2500mA Sec: 30W Max Sec: 30W Max For LED modeles only Sec: 30W CB T D SELV O T	155	53	30
8		±1	±1	±1

Features

- •100~240Vac 50/60Hz
- •Built-in active PFC function
- •Flicker Free
- •Short circuit,Over current,Over voltage Protection
- •Air Cooling
- •Applied to LED lighting etc

- •No load and Safety Protection Device
- •Installed economically and quickly
- •Complied with the world safety standard of lighting
- •Protection class II
- •5 years Warranty

Description

BQ-030ANPV 0-10V dimmable LED Driver is a kind of Constant Voltage LED power supply that our company R&D, with high power factor, high efficiency, high precision, adopting the high efficiency, stable, low loss of switch control chip. It was made with high-quality components, so it had the characteristics like low noise, energy-saving, environmental protection, and long life, etc.




1.4 Working principle

BQ-030ANPV 0-10V Dimmable LED

Driver is with the Constant Voltage feature,

the working condition is as the picture under.

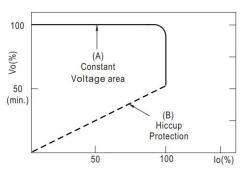

Typical output current normalized by rated current (%)



- Connect the 0-10V signals to the DIM terminal and the positive electrode connects to +, and the negative electrode connects to -.

- In 0-10V dimming mode, when the input voltage is less than 0.9V, the light will be turned off. When it's more than 0.9V, the light will be turned on. ($\pm 0.2V$ tolerance is acceptable.)

- The minimum dimming depth of 0-10V dimming is 0.5%.

- The pins of the 0-10V DIM terminal without any signal connected: 100% rated output current

1.5 Circuit Drawing



深圳市博鑫奇科技有限公司 Shenzhen BoXinQi Technology Co.,Ltd


2. Electric Idiosyncrasy

2.1 Specs.

Model		BQ-030ANPV		
	DC Voltage	12V	24V	
	Output Current	2500mA	1250mA	
	Output Power	3	30W	
Output	Flicker Index	Modulation depth ≤1% Complies with the flicker-free standard (IEEE Std 1789-2015)		
	Ripple Voltage	<10%		
	Voltage Tolerance	±0.5V		
	Temperature Drift	±5%		
	Start-up Time	<1.5S@230Vac		
	Input Voltage	100-240VAC		
	Frequency Range	47-63Hz		
	Power Factor(Typ.)@ full load	0.95@115VAC 0.93@230\	/AC	
Input	THD(Typ.)@ full load	<20%		
	Efficiency(Typ.)@ full load	86%	88%	
	AC Current(Max.)	0.3A@230VAC		
	Inrush Current (Typ.)	20A, 50%, 1.6ms		
	Leakage current	<0.5mA		
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed		
	Over temperature	$100^{\circ}C \pm 10^{\circ}C$ shut down o/p voltage, automatically recover after cooling.		
	Working TEMP.	-40~+60 ℃		
Environment	Working Humidity	20~90%RH, non-condensi	ng	
Environment	Storage TEMP. Humidity	-40~+80℃,10~95%RH		
	Atmospheric Pressure	86kPa~106kPa		
	Safety standards	EN61347		
	Withstand voltage	I/P-O/P: 3.75KVac		
Safety& EMC	Insulation Resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH		
	EMC EMISSION	EN55015; EN61000-3-2; EN61000-3-3;		
	EMC IMMUNITY	EN61547		
	Dimming Function	0-10V		
Others	Dimension	155*53*30 mm (L*W*H)		
	Warranty	5 Years		




2.2 Characteristic Curve

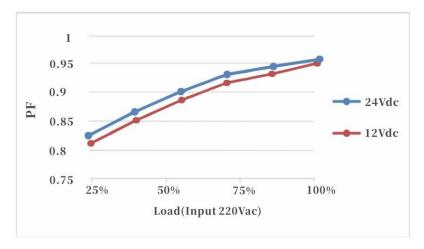


2.2.1 Power Factor Characteristic Curve

2.2.2 Power Efficiency Characteristic Curve

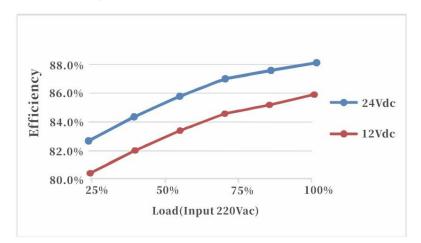


2.2.3 Lifetime Characteristic Curve

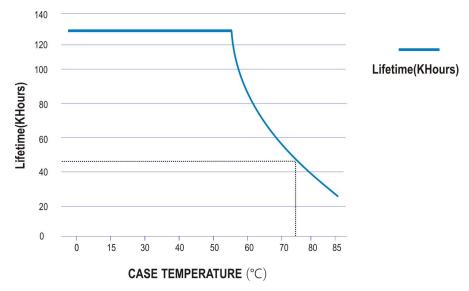



深圳市博鑫奇科技有限公司 Shenzhen BoXinQi Technology Co.,Ltd

2.2.4 Dimming Curve

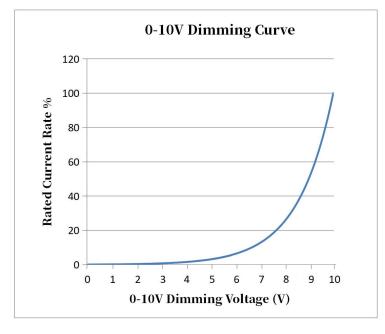



深圳市博鑫奇科技有限公司 Shenzhen BoXinQi Technology Co.,Ltd

3. Real Photo

