




## Product Specification

<b>Title</b>	<b>DALI Dimmable LED Driver</b>
<b>Model</b>	<b>BQ-050DNPC</b>
<b>Specification</b>	<b>Input: 100~265Vac 50/60Hz</b> <b>Output: 50-72V/600mA 24-42/1000mA</b>
<b>Power Range</b>	<b>24-42W</b>
<b>Author</b>	<b>R&amp;D</b>
<b>Document NO.</b>	<b>RDPS-2305</b>
<b>Date</b>	<b>2021-01-04</b>
<b>Revision</b>	<b>2.0</b>

## 1. Product Description

1.1 This engineering report describes the design for a **DALI dimmable Constant Current led driver** for LED applications.

### 1.2 Prototype Photo

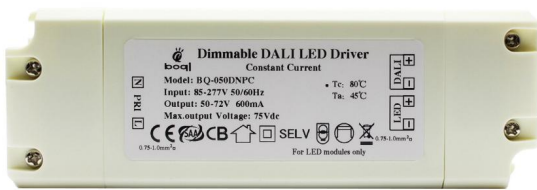

### 1.3 Physical size

	L (mm)	W (mm)	H (mm)
	140	47	28
	±1	±1	±1

### Features


- 100~265Vac 50/60Hz
- Built-in active PFC function
- Short circuit,Over current,Over voltage Protection
- Air Cooling
- Integrated Dali standard interface
- Applied to LED homing and commercial lighting etc
- No load and Safety Protection Device
- Installed economically and quickly
- Complied with the world safety standard of lighting
- Protection class II
- 5 years Warranty

### Description

BQ-050DNPC DALI dimmable LED Driver is the kind of CC dimmable LED power supply that our company R&D, with high power factor, high efficiency, high precision, adopting the high efficiency, stable, low loss of switch control chip. It was made with the high quality components, so it had the characteristics like low noise, energy saving, environmental protection and long life etc.

## 1.4 Working principle

BQ-050DNPC DALI Dimmable LED Driver is with the CC feature, the working condition is as the picture under.

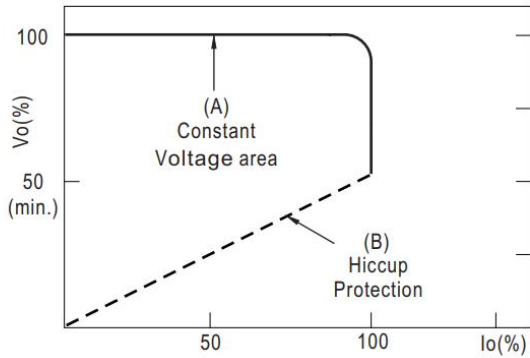

Typical output current normalized by rated current (%)

## 2. Electric Idiosyncrasy





### 2.1 Specs.



Model		BQ-050DNPC	
<b>Output</b>	DC Voltage	50-72V	24-42V
	Output Current	600mA	1000mA
	Output Power	24-42W	
	Flicker Index	Modulation depth ≤1% Complies with the flicker-free standard (IEEE Std 1789-2015)	
	Ripple Current	<5%(rated current)	
	Current Tolerance	±5%	±5%
	Temperature Drift	±5%	
	Start-up Time	<1.5S@230Vac	
<b>Input</b>	Input Voltage	100-265VAC	
	Frequency Range	47-63Hz	
	Power Factor(Typ.)	0.97@115VAC 0.95@230VAC @ full load	
	THD(Typ.)@ full load	<20%@230Vac (DC42V full load)	
	Efficiency(Typ.)	88%@ full load	88%@ full load
	AC Current(Max.)	0.3A	
	Inrush Current (Typ.)	≤20A&120uS@230Vac (Max)	
	Leakage current	<0.7mA	
	Standby Power Consumption	≤0.5W (when DALI OFF signal is effective)	
	<b>Protection</b>	Short Circuit	Hiccup mode (auto-recovery)
Over temperature		100℃±10℃ shut down o/p voltage, automatically recover after cooling.	
<b>Environment</b>	Working TEMP.	-20℃ - +45℃ (see below derating curve)	
	Working Humidity	20~90%RH, non-condensing	
	Storage TEMP.Humidity	-30~+80℃, 10~90%RH	
	Atmospheric Pressure	86kPa~106kPa	
<b>Safety&amp; EMC</b>	Certifications	TUV-CE, CB, SAA, RoHS	
	Safety standards	EN61347	
	Withstand voltage	I/P-O/P: 3.75KVac 5mA 60S	
	Insulation Resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH	
	EMC EMISSION	EN55015; EN61000-3-2; EN61000-3-3;	
	EMC IMMUNITY	EN61547	
<b>Others</b>	DALI Standard	IEC 62386-101 102 207: DALI 2.0	
	Dimension	140*47*28 mm (L*W*H)	
	Warranty	5 Years (Tc≤77.5℃)	

## 2.2 Characteristic Curve


### 2.2.1 Power Factor Characteristic Curve

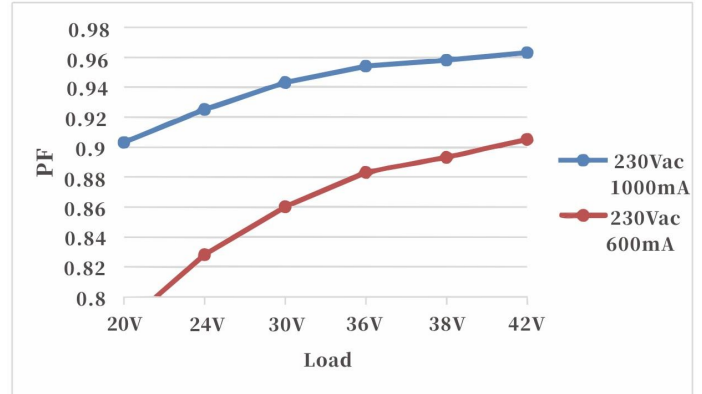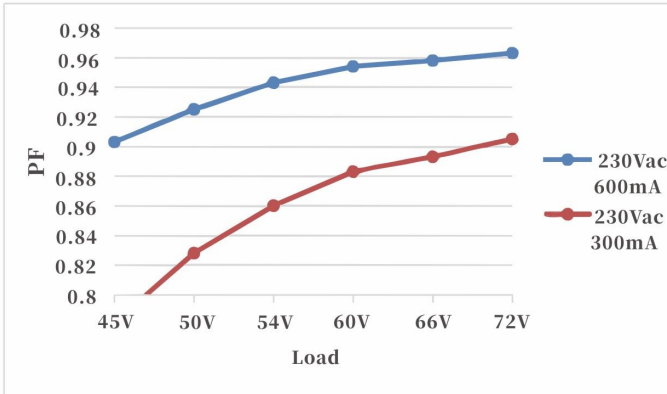

### 2.2.2 Power Efficiency Characteristic Curve

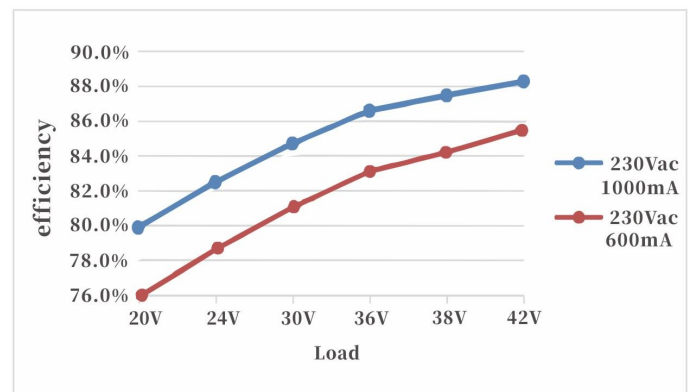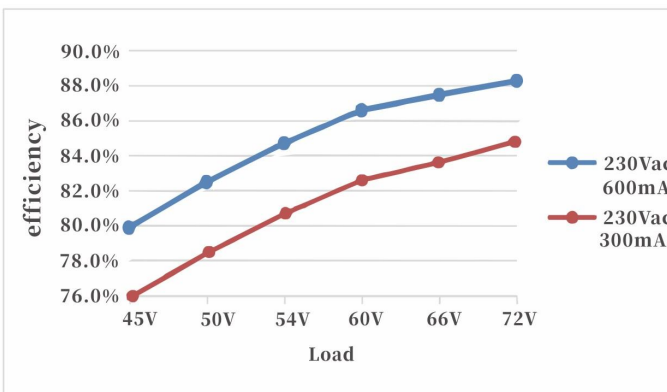


### 2.2.3 Lifetime Characteristic Curve

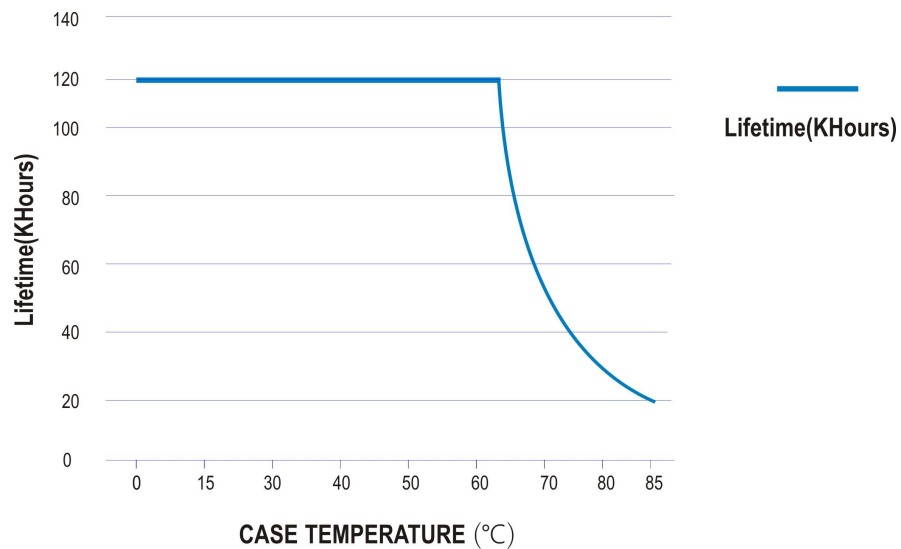

## 2.2.4 Dimming Curve

DALI Logarithmic Dimming Curve

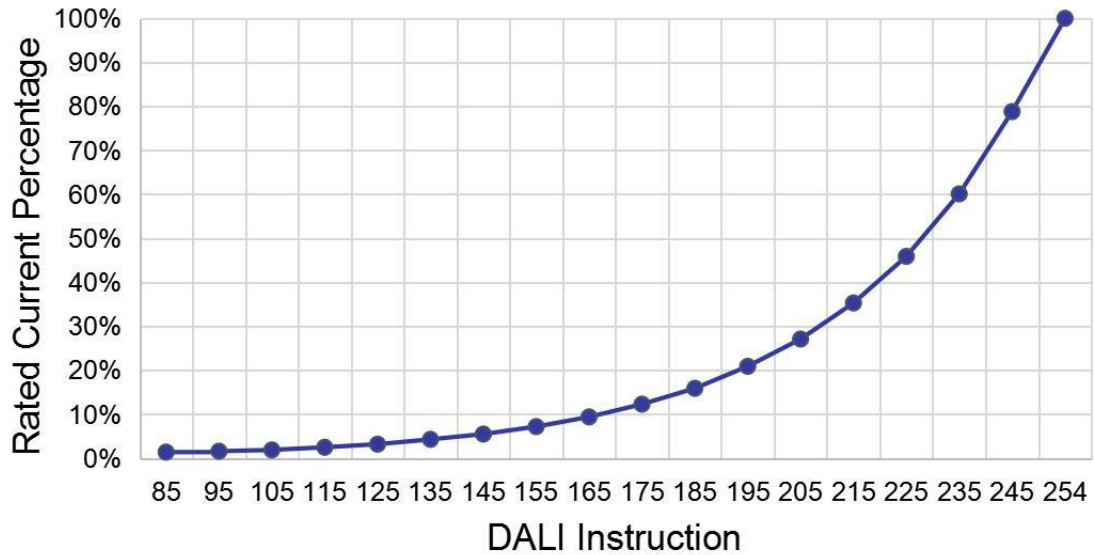

### Operation Instructions of DALI Dimming

Factory default setting is of 100% brightness.


Connect the DALI signal to the DA1 and DA2 terminals.

DALI protocol includes 16 groups and 64 IP addresses.



The minimum dimming depth of the DALI dimming is 0.1% (Iout).

## 2.3 Circuit Drawing

1. When using this product, Please differentiate its input and output terminal. PRI is AC input, Connect ACL to firing line, ACN to null line; DC output, LED + and LED - connect the positive and negative of LED lamps separately; DA1 and DA2 DALI signal lines, no need to differentiate the positive and negative.
2. This product is a high Voltage LED lamps controller, please cut off the power before installation, Wiring according to the chart as shown, Connect LED+ and LED- , then connect the DA1 and DA2 signal wire, at last connect ACL and ACN. After verification to electricity.

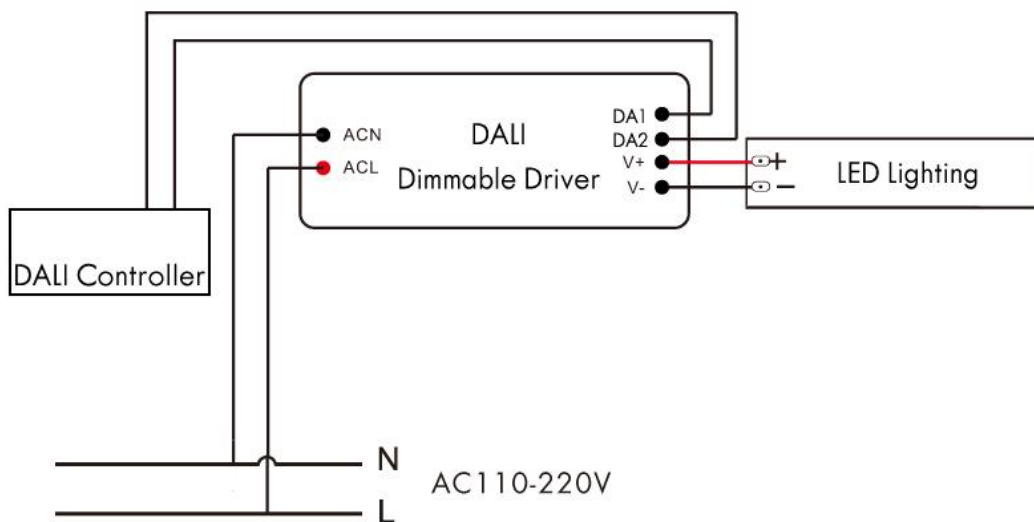

### 3. Real Photo

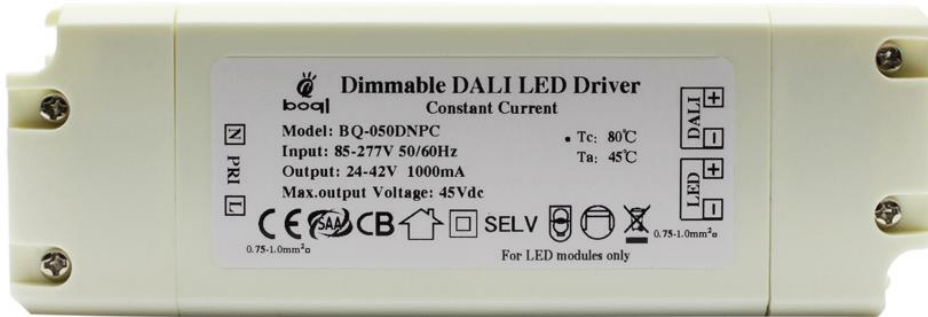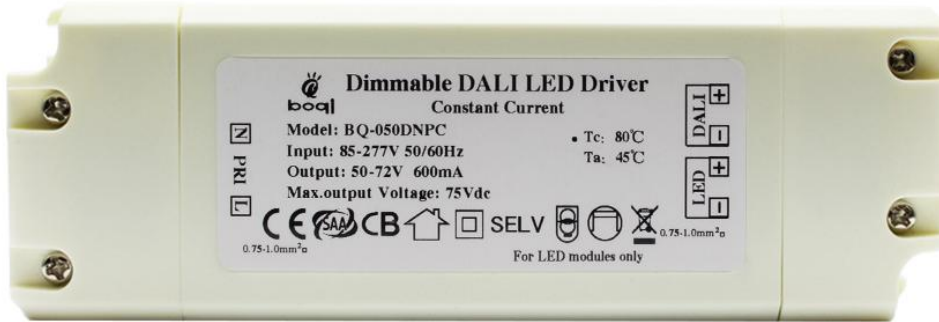



## Common Fault and Handing Method

The product is installed according to the chart as shown, If meet the below faults :

1. LED lamp is not bright,Please cut off the power, and check
  - a. Whether the output end is bad contact.
  - b. Whether the positive negative of the output end are against.
  - c. Whether the input end is bad contact.
  - d. Whether the LED line and DALI signal line are against. Test again after

excluding below fault.

2. Light-up the LED lamp, but the brightness is abnormal (LED lamp is flicking, too bright or too dark) or can not be dimmed, Please cut off the power immediately, and check if the LED lamps accord with the products' output demand(LED lamp power is too small or too big), whether the DALI parameters are set correctly.

3. During the product using, If you meet other queries,and can not solve by yourself, Please contact us immediately. We will try our best to improve and optimize in time.